



MAXI Rotary Harrows

**Rite Way's MAXI Rotary Harrows
are Three Harrows in One:**

25 to 30 degrees


Get rid of weeds - chemical free
Dry wet spots on your field for earlier seeding

30 to 40 degrees

Knock down and break up heavy trash, including corn stalks
Level smaller ridges and prepare an even seedbed
Leave trash on surface and fill in cracks to conserve moisture

40 to 45 degrees

Smooth rough fields, breaking up large lumps and levelling large ridges
Remove root balls from the soil
Rejuvenate pasture and hay fields

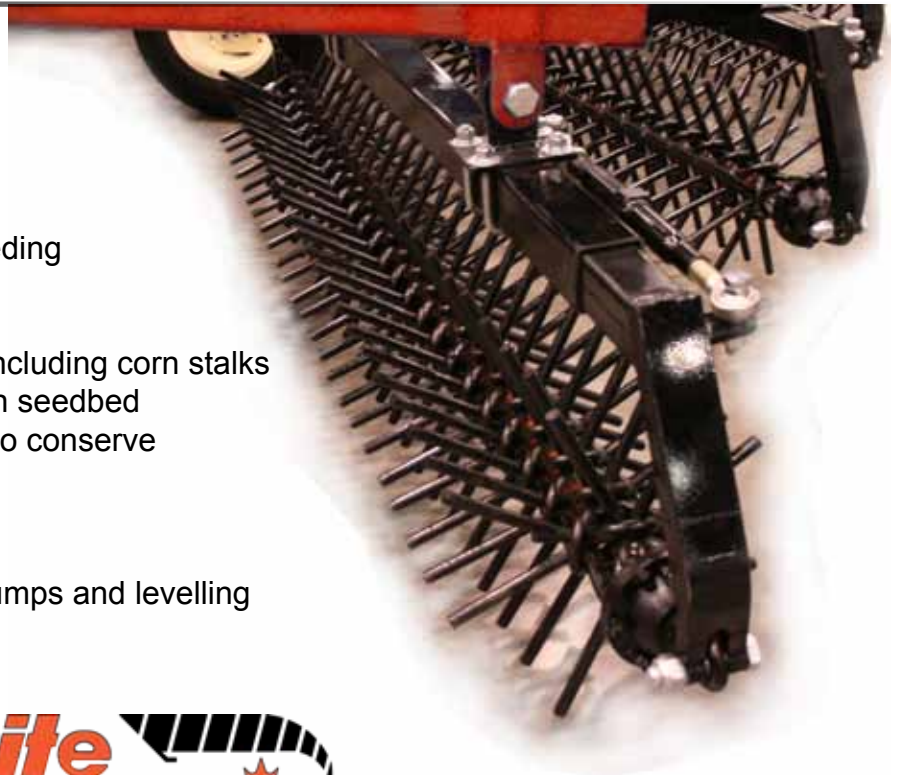

Reasons to Own a Rite Way Maxi Harrow

Largest diameter interlocking tine available

At 18" in diameter, the Rite Way MAXI has the largest tines available on the market. And, they are cold-formed which provides even more durability. These tines interlock to form an extremely strong, yet flexible chain that produces the results you want in one pass.

Adjust tine angle on-the-go from the cab of your tractor

As your field conditions change, you can change the angle of the tines while you work – right from the cab of your tractor. Adjust from 20 to 45 degrees.

Superior trash cleaning

The MAXI efficiently manages surface trash and, if desired, residue from below the soil's surface. The residue remains on the surface where it conserves soil moisture and leaves a firm seedbed.

Narrow transport width

When it's time to move on to the next field, you can transport your MAXI Harrows with confidence, as they fold up to a mere 10'.

Helps even out soil moisture content

Dries wet soil, allowing you to seed earlier than would be otherwise possible; or

Produces a mulch on the surface, maintaining soil moisture.

Control aggressiveness of harrows by adjusting tine angle

Whether you want to simply penetrate the soil crust or knock down corn stalks, the MAXI will do the job you need it to do by simply adjusting the angle of the tines.

From transport mode to field mode in minutes with FORWARD™ Unfolding System

You can transport the MAXI to your field, and be working in minutes. That's because all you need to do to unfold it is drive forward with our patent-pending FORWARD™ Unfolding System.

The right size for your operation

The MAXI comes in the right size for your operation. Depending on what angle you are using, the MAXI has a working width of from 27' to 68'.



MAXI Harrow Specifications

Working width at 20°	27'	40'	54'	68'
Working width at 45°	23'	36'	40'	64'
Transport width	10'	10'	10'	10'
Tires, main frame	Standard: 11L x 15-8 ply Opt: 12L x 15-12 ply	Standard: 11L x 15-8 ply Opt: 12L x 15-12 ply	Standard: 11L x 15-8 ply Opt: 12L x 15-12 ply	Standard: 11L x 15-8 ply Opt: 12L x 15-12 ply
Tires, wings	11L x 15-8 ply	11L x 15-8 ply	11L x 15-8 ply	11L x 15-8 ply
Weight	6200 lbs.	7400 lbs.	8600 lbs.	9800 lbs.



Rite Way Mfg. Co. Ltd.

P.O. Box 328 Imperial, SK S0G 2J0 Canada
www.ritewaymfg.com info@ritewaymfg.com
 Ph: 306-963-2180 Toll Free: 1-800-352-8822