

**RITEWAY** 

**ROTARY  
HARROW**

# **RH 9200**

ROTARY HARROW



**RITEWAY** 

**ROTARY  
HARROW**

**RH9200**

## ***FLEXIBLE FIELD PREPARATION.***

Knock down and break up heavy straw and trash, including cornstalks. Dry out wet spots. Break through the crust and level out ridges and lumps to prepare an even seedbed, incorporate granular fertilizer and chemicals. As your field conditions change, just change the tine angle on your RH9200 and it will do the job you need it to do.



## **ROTARY HARROW FEATURES**

### **1 - Large, ultra-strong tines.**

At 18" in diameter, the RH9200 tines are the largest available on the market, and they are cold-formed for durability. They interlock to form an extremely strong, yet flexible chain.

### **2 - Adjust tine angle on-the-go.**

Field conditions can change rapidly. As they change, you can adjust the angle of the tines right from the cab of your tractor. Adjust from 25° to 40°.

### **3 - Even-out soil moisture.**

Dry the wet soil, which allows you to seed earlier than would otherwise be possible. Fill cracks in dry land and produce a mulch on the surface to maintain soil moisture.

### **4 - Superior trash management.**

Efficiently shatter straw and surface trash and, if desired, residue from below the soil's surface. The RH9200 will even remove corn root balls from the soil. And it does all that without plugging!


### **5 - Superior chemical incorporation.**

Incorporate chemicals efficiently, even in large amounts of trash.

### **6 - Prepare the seedbed.**

Break through the crust and level out lumps and ridges. Get rid of mole hills and gopher mounds. Rejuvenate pasture and hayfields.

## **ADJUSTABLE TINE ANGLE FOR EFFICIENT FIELD MANAGEMENT.**

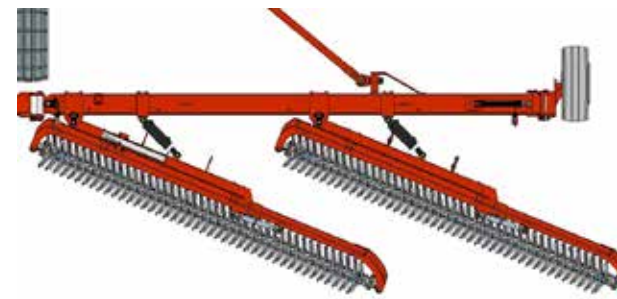

Adjust tine angle from 25° to 40° depending on field conditions and preference.

### **STANDARD EQUIPMENT:**

- Hydraulically controlled tine angle (25° to 40°)
- 3/4" x 18" interlocking tines
- Quick-tension adjustment tines: Each section - 172 tines
- Auto-fold with Rite Way hydraulic pivot wheel system
- Adjustable hitch height with perfect hitch
- Heavy duty wing, centre bar and A-frame
- Solid pull draft arm
- Safety chains
- Light package

### **OPTIONAL EQUIPMENT:**

- Acre meter-ready
- Granular applicator



**RH9200**  
**TRANSPORT WIDTH**  
12'6" - 14'6"





# AGGRESSIVE WHEN NEEDED. EFFECTIVE ALWAYS.

Wet years or dry. On pastureland or harvested field. The Rite Way RH9200 Rotary Harrow becomes the tillage equipment you need it to be by simply adjusting the tine angle from your tractor cab.

## SPECIFICATIONS:

RH9200				
MODEL	DESCRIPTION	SIZE*	TRANSPORT WIDTH**	WEIGHT
RH-9245	<b>5 Section</b> Hydraulic Angle 25° - 40°	<b>45'</b> (13.72 m)	<b>14' 6"</b> (4.4 m)	<b>10,950 lbs</b> (4,967 kg)
RH-9260	<b>7 Section</b> Hydraulic Angle 25° - 40°	<b>60'</b> (18.28 m)	<b>14' 6"</b> (4.4 m)	<b>13,450 lbs</b> (6,101 kg)
RH-9275	<b>9 Section</b> Hydraulic Angle 25° - 40°	<b>75'</b> (22.86 m)	<b>14' 6"</b> (4.4 m)	<b>15,950 lbs</b> (7,235 kg)

\*Size of machine is measured at maximum gang angle

\*\*Centre section can be repositioned allowing a 12' 6" transport width

TIRES		
MODEL	MAIN FRAME	WING AXLE
All Models	16.5L x 16.1 - 8 ply	11L x 15 - 8 ply

Quick-tension adjustment tines:

11' Section - 172 tines

3/4" x 18" (1.9 cm x 45.6 cm) interlocking tines

Large floatation tires on Main Frame and Wings

### FEATURES:

Auto-fold with Rite Way hydraulic pivot

wheel system

Light Package



We are continuously improving our products. Design, specifications, and material are subject to change without notice.

For more information on the Rotary Harrow, or other land improvement equipment, visit your local Rite Way equipment dealer, or visit [www.RiteWayMfg.com](http://www.RiteWayMfg.com)

Toll free: 1-800-352-8822



/RiteWayMfg



@RiteWayMfgCo

© RITE WAY MFG. CO. LTD. PRINTED IN CANADA 1811

